



SC3E8 Series

Description

Gas discharge Tubes (GDT) are classical components for protecting the installations of the telecommunications. It is essential that IT and telecommunications systems -with their high-grade but sensitive electronic circuits - be protected by arresters. They are thus fitted at the input of the power supply system together with varistors and at the connection points to telecommunication lines. They have become equally indispensable for protecting base stations in mobile telephone systems as well as extensive cable television (CATV) networks with their repeaters and distribution systems.

These protective components are also indispensable in other sectors, In AC power transmission systems, they are often used with current-limiting varistors, In customer premises equipment such as DSL modems, WLAN routers, TV sets and cable modems In air-conditioning equipment, the integral black-box concept offers graduated protection by combining arresters with varistors, PTC, diodes and inductor.

Features

- ♦ Non-Radioactive
- RoHS compliant
- ♦ Low insertion loss
- Excellent response to fast rising transients
- Ultra low capacitance
- 20KA surge capability tested with 8/20µs pulse as defined by IEC 61000-4-5
- Available with thermal failsafe option (add 'F' suffix to part number)

Applications

- Communication equipment
- CATV equipment
- ◆ Test equipment
- Data lines
- Power supplies
- ◆ Telecom SLIC protection
- Broadband equipment
- ADSL equipment, including ADSL2+
- XDSL equipment
- Satellite and CATV equipment
- Consumer electronics

SC3E8-XXXHMF SC3E8-XXXHMF





SC3E8-XXXHP







Schematic Symbol



a = Tip b = Ring e = Ground (center electrode)

Agency Approvals

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| 71° | E341061 |

Product Characteristics

| Materials | Nickel-plated with Tinplated wires | | | | |
|---|--|-------|--|--|--|
| Product Marking | SOCAY XXXH XXX -Nominal voltage H -20KA | | | | |
| Glow to Arc Transition Current | ~1 Amps | | | | |
| Glow Voltage | ~70 Volts | | | | |
| Storage and Operational Temperature | -40 to +90°C | | | | |
| | SC3E8-XXXHM | ~2.0g | | | |
| Weight | SC3E8-XXXHMF | ~2.3g | | | |
| Weight | SC3E8-XXXHP | ~2.1g | | | |
| | SC3E8-XXXH | ~1.8g | | | |
| Climatic category (IEC 60068-1) | 40/ 90/ 21 | | | | |







SC3E8 Series

Dimensions (Unit: mm)


Radial Leaded Devices (SC3E8-XXXHM)

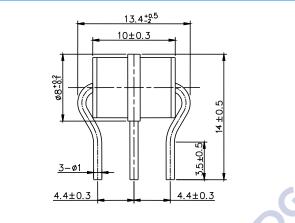


Radial Leaded Devices with Fail-Safe (SC3E8-XXXHMF)

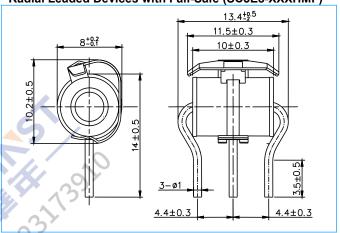

"T" Leaded Devices (SC3E8-XXXHP)

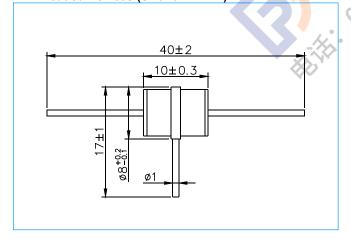

Without wire Devices (SC3E8-XXXH)

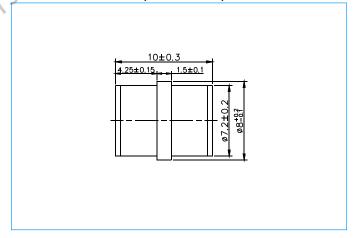

Electrical Characteristics

| | | | | | | | | Service Life | | | |
|--|--------------|---------|----------|---------|------------------|--|-------------------------------------|--|---------------------------------|------------------------------------|---------------------------------------|
| Part Number | Marking | ig In | | | Arc Voltage | Nominal Impulse Discharge Current | Max Impulse Discharge Current | Nominal Alternating Discharge Current | Impulse Life | | |
| | | @100V/S | @100V/µs | @1KV/μs | | @1MHz | @1A | @8/20µs ⁴⁾ ±5 times | @8/20µs ⁴⁾ 1 time | @50Hz ⁴⁾ 1 Sec 10 times | @10/1000µs ⁴⁾ 300 times |
| SC3E8-75HM SC3E8-75HMF SC3E8-75HP SC3E8-75H | SOCAY 75H | 75V±20% | <500V | <600V | 1 GΩ (at 25V) | <1.5pF | ~15V | 20KA | 25KA | 20A | 200A |
| SC3E8-90HM SC3E8-90HMF SC3E8-90HP SC3E8-90H | SOCAY 90H | 90V±20% | <500V | <600V | 1 GΩ (at 50V) | <1.5pF | ~15V | 20KA | 25KA | 20A | 200A |

SOCAY Electronics Corp., Ltd.

www.socay.com





SC3E8 Series

Electrical Characteristics (Continue)

| | | | | Service Life | | | | | | | |
|--|---------------|--------------------------|----------|-------------------------|-------------------------------------|------------------------|----------------|--|-------------------------------------|--|---------------------------------------|
| Part Number | Marking | DC Spark-over Voltage | | n Impulse er Voltage | Minimum Insulation Resistance | Maximum Capacitance | Arc Voltage | Nominal Impulse Discharge Current | Max Impulse Discharge Current | Nominal Alternating Discharge Current | Impulse Life |
| | | @100V/S | @100V/µs | @1KV/μs | | @1MHz | @1A | @8/20µs ⁴⁾ ±5 times | @8/20µs ⁴⁾ 1 time | @50Hz ⁴⁾ 1 Sec 10 times | @10/1000µs ⁴⁾ 300 times |
| SC3E8-150HM SC3E8-150HMF SC3E8-150HP SC3E8-150H | SOCAY 150H | 150V±20% | <500V | <600V | 1 GΩ (at 50V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |
| SC3E8-230HM SC3E8-230HMF SC3E8-230HP SC3E8-230H | SOCAY 230H | 230V±20% | <600V | <700V | 1 GΩ (at 100V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |
| SC3E8-250HM SC3E8-250HMF SC3E8-250HP SC3E8-250H | SOCAY 250H | 250V±20% | <600V | <700V | 1 GΩ (at 100V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |
| SC3E8-300HM SC3E8-300HMF SC3E8-300HP SC3E8-300H | SOCAY 300H | 300V±20% | <800V | <900V | 1 GΩ (at 100V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |
| SC3E8-350HM SC3E8-350HMF SC3E8-350HP SC3E8-350H | SOCAY 350H | 350V±20% | <800V | <900V | 1 GΩ (at 100V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |
| SC3E8-420HM SC3E8-420HMF SC3E8-420HP SC3E8-420H | SOCAY 420H | 420V±20% | <900V | <1000V | 1 GΩ (at 100V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |
| SC3E8-470HM SC3E8-470HMF SC3E8-470HP SC3E8-470H | SOCAY 470H | 470V±20% | <900V | <1000V | 1 GΩ (at 100V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |
| SC3E8-600HM SC3E8-600HMF SC3E8-600HP SC3E8-600H | SOCAY 600H | 600V±20% | <1100V | <1200V | 1 GΩ (at 100V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |
| SC3E8-800HM SC3E8-800HMF SC3E8-800HP SC3E8-800H | SOCAY 800H | 800V±20% | <1200V | <1400V | 1 GΩ (at 100V) | <1.5pF | ~25V | 20KA | 25KA | 20A | 200A |

Notes:

- 1). Terms in accordance with ITU-T K.12 and GB/T 9043-2008
- 2). At delivery AQL 0.65 level II, DIN ISO 2859
- 3). Tip or ring electrode to center electrode
- 4). Total current through center electrode, half value through tip respectively ring electrode







SC3E8 Series

Electrical Rating

| Item | Test Condition / Description | Requirement |
|--|---|-----------------------------------|
| DC Spark-over Voltage Impulse Spark-over Voltage | The voltage is measured with a slowly rate of rise dv / dt=100V/s The maximum impulse spark-over voltage is measured with a rise time of dv / dt=100V//µs or 1KV/µs | |
| Insulation Resistance | The resistance of gas tube shall be measured each terminal each other terminal, please see above spec. | |
| Capacitance | The capacitance of gas tube shall be measured each terminal to each other terminal. Test frequency:1MHz | |
| Nominal Impulse Discharge Current | The maximum current applying a waveform of 8/20µs that can be applied across the terminals of the gas tube. One hour after the test is completed, re-testing of the DC spark-over voltage does not exceed ±30% of the nominal DC spark-over voltage. Dwell time between pulses is 3 minutes. 1.0 0.9 0.5 8µsec 20µsec 30% Max T Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. The DC | To meet the specified value |
| Nominal Alternating Discharge Current | Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. The DC spark-over voltage does not exceed $\pm 30\%$ of the nominal DC spark-over voltage. IR > 10^8 ohms. | |

Recommended Soldering Profile

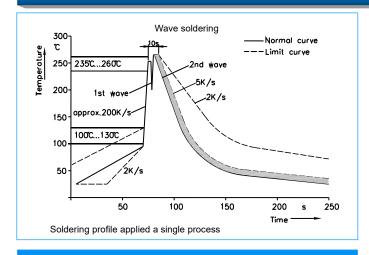

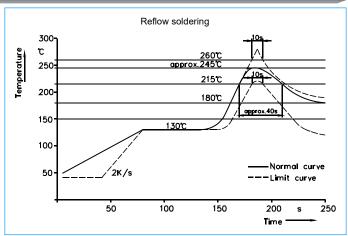

Soldering Parameters - Hand Soldering


Solder Iron Temperature: 350°C +/-5°C Heating Time: 5 seconds max.






SC3E8 Series


Part Numbering

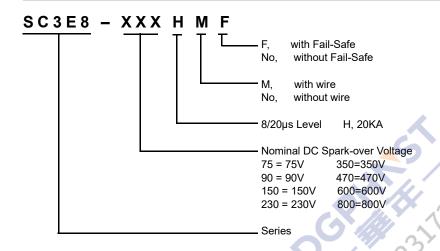

Packaging

| Part Number | Description | Quantity | | |
|--------------|--|----------|--|--|
| SC3E8-XXXHM | 100PCS per Tray, 10 Trays / Inner Carton | 1000 PCS | | |
| SC3E8-XXXHMF | 100PCS per Tray, 10 Trays / Inner Carton | 1000 PCS | | |
| SC3E8-XXXHP | 50PCS per Tray, 10 Trays / Inner Carton | 500 PCS | | |
| SC3E8-XXXH | 100PCS per Tray, 10 Trays / Inner Carton | 1000 PCS | | |

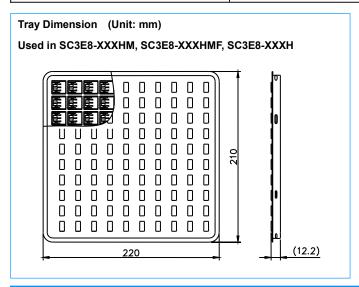

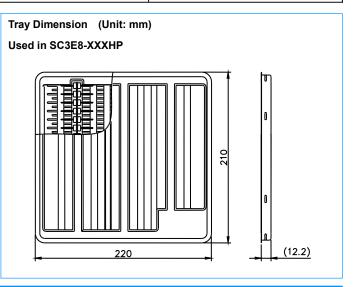

Cautions and Warnings

- Gas discharge tubes (GDT) must not be operated directly in power supply networks.
- Gas discharge tubes (GDT) may become hot in case of longer periods of current stress (danger of burning).
- Gas discharge tubes (GDT) may be used only within their specified values. In the event of overload, the head contacts may fail or the component may be destroyed.
- Damaged Gas discharge tubes (GDT) must not be re-used.