

KEMET Tantalum SMD Capacitors T490 - High CV Consumer Series



High CV Consumer Series (T490)




Features & Benefits

- High Volumetric Efficiency
- Surface Mount Technology
- Operating Temperature: -55°C to +40°C, Rated Voltage (Vr)
- Operating Range: 0.5Vr @ 85°C; 0.2Vr @ 125°C
- Voltage Range: 4V to 10V
- Capacitance Range: 47 µF to 470µF
- Small & Low Profile Case Sizes
- Suitable for 3x260°C reflow
- RoHS compatible (Lead-free LF and Green compound)
- Consumer products applications (low temperature applications)

Dimensions

KEMET	EIA	L*	W*	H*
A	3216-18	3.2 ± 0.2 (.126 ± .008)	1.6 ± 0.2 (.063 ± .008)	1.6 ± 0.2 (.063 ± .008)
B	3528-21	3.5 ± 0.2 (138 ± .008)	2.8 ± 0.2 (.110 ± .008)	1.9 ± 0.2 (.075 ± .008)
T	3528-12	3.5 ± 0.2 (.138 ± .008)	2.8 ± 0.2 (.110 ± .008)	1.2 (.047)

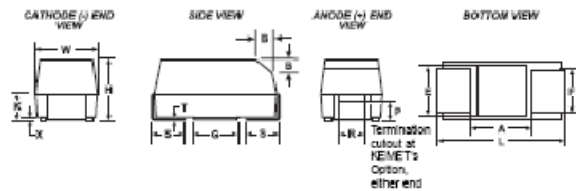

Ordering Information

T	490	B	227	M	006	A	T	E500
Capacitor Class	Series	Case Size	Capacitance Code (pF)	Capacitance Tolerance	Voltage	Failure Rate/ Design	Lead Material	ESR
T = Tantalum	High CV Consumer Series	A, B, T	First two digits represent significant figures. Third digit specifies number of zeros.	K = ±10% M = ±20%	004 = 4V 006 = 6.3V 010 = 10V	A = N/A	T = 100% Matte Tin (Sn) Plated*	E=ESR Last three digits specify ESR in mOhms (500 = 500mOhms)

KEMET Tantalum SMD Capacitors T490 - High CV Consumer Series



T490 Series Waterfall Chart

Capacitance	Voltage		
	4 V	6.3 V	10 V
47 μ F		T 500	A 600 T 600
68 μ F		A 500 T 600	A 600 T 1000
100 μ F	A 800	A 500/800 T 1000	A 800 T 1000
150 μ F	A 800 T 800	A 800 T 800 B 800	B 800
220 μ F	A 800 B 500 T 800	B 500	B 1K0
330 μ F	B 800	B 800	
470 μ F	B 800		

XXX Part Type Qualified

xxx Part Type under Development

KEMET Tantalum SMD Capacitors

T490 - High CV Consumer Series



T490 Part Type Ratings

Rated Voltage (V)	Rated Capacitance (μF)	Case Code/ Case Size	KEMET Part Number	DC Leakage μA @ 25°C max/5min	ESR mΩ @ 25°C 100 kHz Max	ESR Espec Code
4	100	A/3216-18	T490A107M004ATE500	4.0	500	E500
4	150	A/3216-18	T490A157M004ATE800	6.0	800	E800
4	220	B/3528-21	T490B227M004ATE500	8.8	500	E500
4	330	B/3528-21	T490B337M004ATE800	13.2	800	E800
4	150	T/3528-12	T490T157M004ATE800	6.0	800	E800
6.3	68	A/3216-18	T490A686M006ATE500	4.3	500	E500
6.3	100	A/3216-18	T490A107M006ATE500	6.3	500	E500
6.3	100	A/3216-18	T490A107M006ATE800	6.3	800	E800
6.3	150	B/3528-21	T490B157M006ATE800	9.5	800	E800
6.3	220	B/3528-21	T490B227M006ATE500	13.9	500	E500
6.3	47	T/3528-12	T490T476M006ATE500	4.7	500	E500
6.3	68	T/3528-12	T490T686M006ATE600	4.3	600	E600
6.3	100	T/3528-12	T490T107M006ATE1K0	6.3	1000	E1K0
10	47	A/3216-18	T490A476M010ATE600	4.7	600	E600
10	150	B/3528-21	T490B157M010ATE800	15.0	800	E800