




5HT Φ 5.2x20 RoHS Compliant

陶瓷保险丝管(延时型) Ceramic Tube Fuse (Time-Lag) 600V/500V/400V

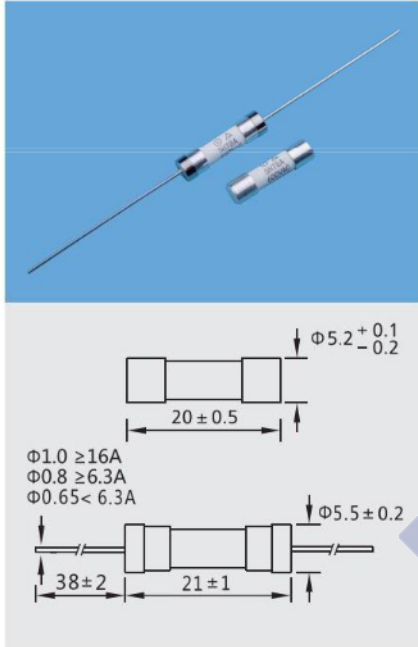


测试标准:
Testing Standard:
UL248-1 UL248-14

额定分断能力:
Interrupting Rating:
200 Amperes at 600V AC(100mA~25A)
300 Amperes at 500V DC(100mA~25A)
2000 Amperes at 400V DC(100mA~15A)

工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
End cap: Nickel plated brass
Ceramic tube: Ceramic
Lead wire: Tinned copper wire
Inner cap: Silver plating
焊接方法:
Soldering Method:
Wave soldering: 260°C, 10s max
Manual soldering: 350°C, 5s max

Time-Current Characteristics
时间-电流曲线图

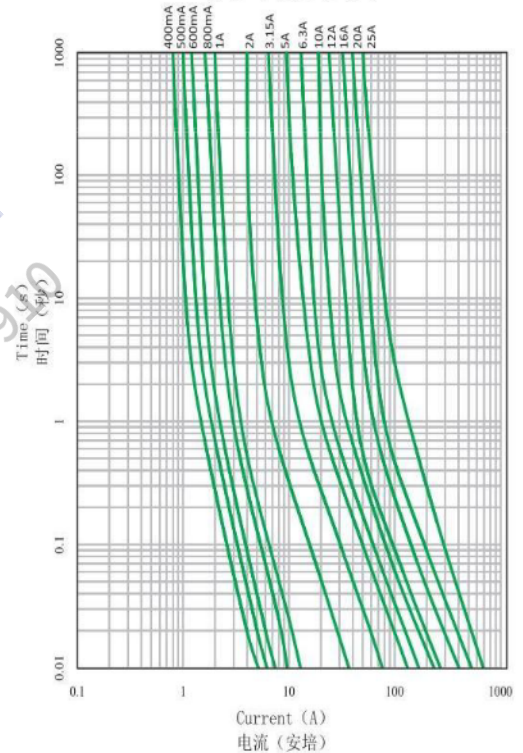

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
210%	30 min Max(小于30分钟)
275%	750 ms~80 s
400%	95 ms~5 s
1000%	20 ms~200 ms

安全认证: Safety Approvals:

认证 Approvals	额定电流 Ampere Rating	额定电压 Voltage Rating	证书号码 Certification No.
UL	1A~25A	600V/500V/400V	E221465
TUV	1A~16A	600V/500V/400V	R50579712

目录编号: Catalog No. K:600V J:500V T:400V

带引线产品目录编号后加"P": Suffix "P" for Lead Type After Catalog No.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals	
					
5HT0400K/J/T	400mA	600V/500V/400V	0.2	●	
5HT0500K/J/T	500mA	600V/500V/400V	0.3	●	
5HT0600K/J/T	600mA	600V/500V/400V	0.5	●	
5HT0800K/J/T	800mA	600V/500V/400V	0.9	●	
5HT1100K/J/T	1A	600V/500V/400V	1.5	●	●
5HT1125K/J/T	1.25A	600V/500V/400V	3.9	●	
5HT1160K/J/T	1.6A	600V/500V/400V	7	●	
5HT1200K/J/T	2A	600V/500V/400V	12.8	●	●
5HT1250K/J/T	2.5A	600V/500V/400V	28	●	
5HT1315K/J/T	3.15A	600V/500V/400V	53	●	●
5HT1400K/J/T	4A	600V/500V/400V	85	●	
5HT1500K/J/T	5A	600V/500V/400V	168	●	●
5HT1630K/J/T	6.3A	600V/500V/400V	274	●	●
5HT1800K/J/T	8A	600V/500V/400V	500	●	●
5HT2100K/J/T	10A	600V/500V/400V	541	●	●
5HT2120K/J/T	12A	600V/500V/400V	590	●	
5HT2160K/J/T	16A	600V/500V/400V	1620	●	●
5HT2200K/J/T	20A	600V/500V/400V	3600	●	
5HT2250K/J/T	25A	600V/500V/400V	8900	●	