




06D RoHS Compliant

贴片保险丝(快断型) cFUS[®] SMD Fuse (Fast-Acting) 32V

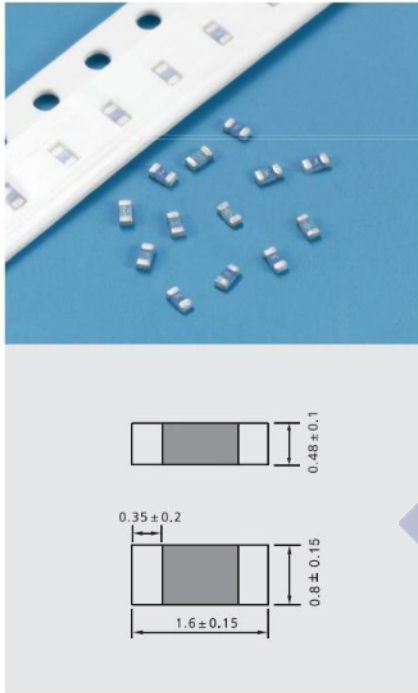

测试标准:
Testing Standard:
UL248-1 UL248-14

额定分断能力:
Interrupting Rating:
50 Amperes at 32V DC(250mA~1A)
35 Amperes at 32V DC(1.25A~5A)


工作温度:
Operating Temperature:
-55°C ~ +125°C

材料:
Materials:
Substrate: Ceramic/glass cover
Termination: Sliver over-plated with nickel and tin
Element: Silver

焊接方法:
Soldering Method:
Reflow soldering: 260°C, 10s max

包装:
Packaging:
Automaton taped 5000PCS per reel,
150000PCS per carton

Time-Current Characteristics
电流-时间曲线图

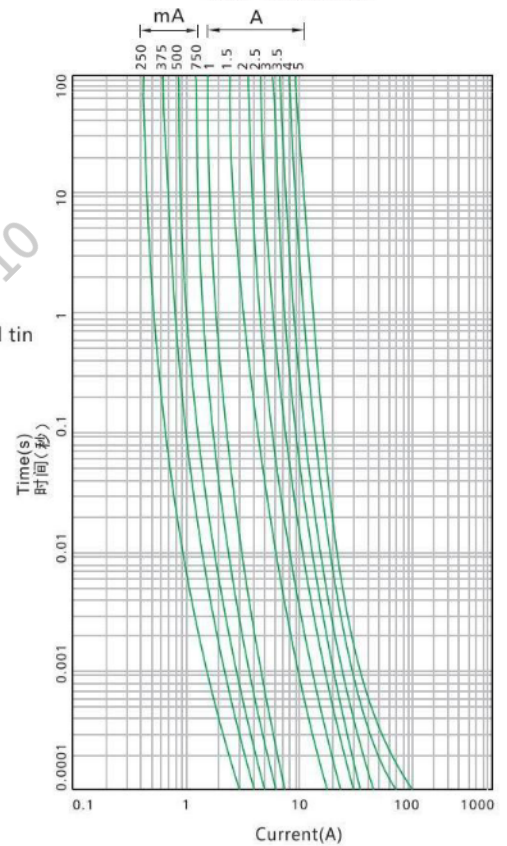

电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	60 s Max(小于60秒)

安全认证: Safety Approvals:

认证 Approvals	额定电流 Ampere Rating	额定电压 Voltage Rating	证书号码 Certification No.
UL	250mA~5A	32V	E221465

目录编号: Catalog No.D:32V.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	标示 Marking	熔化热能 ² Melting Integral (A ² .S)	认证 Approvals ● 表示已获认证 ● 表示认证中 cFUS [®]
06D0250D	250mA	32V	D	0.00040	●
06D0375D	375mA	32V	E	0.00087	●
06D0500D	500mA	32V	F	0.00188	●
06D0750D	750mA	32V	G	0.0088	●
06D1100D	1A	32V	H	0.0108	●
06D1125D	1.25A	32V	J	0.0125	●
06D1150D	1.5A	32V	K	0.0310	●
06D1200D	2A	32V	N	0.0480	●
06D1250D	2.5A	32V	O	0.0615	●
06D1300D	3A	32V	P	0.0690	●
06D1350D	3.5A	32V	R	0.1181	●
06D1400D	4A	32V	S	0.2380	●
06D1500D	5A	32V	T	0.6817	●