


EVH40快速熔断器 / EVH40 High Speed Fuse




- 保护特性 / Class of Operation:
EV Fuse
- 额定电流 电压 Current / Voltage Rating:
100A-400A 1000Vdc
- 参考标准/Ref.to Standard:
UL248-13 ; IEC 60269-4
- 额定分断能力/Interrupting Rating:
50kA at 1000Vdc
- 工作温度/Operating Temperature:
-40°C~120°C
- 材料/Material:
Terminals: Tin plated brass / Tube: Ceramic Tube
Element: Composite copper / Filler: Silica Sand

产品尺寸/Dimension

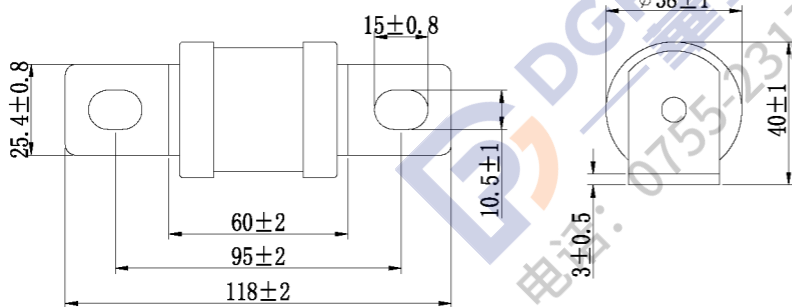

时间-电流曲线图 Time-Current Characteristics

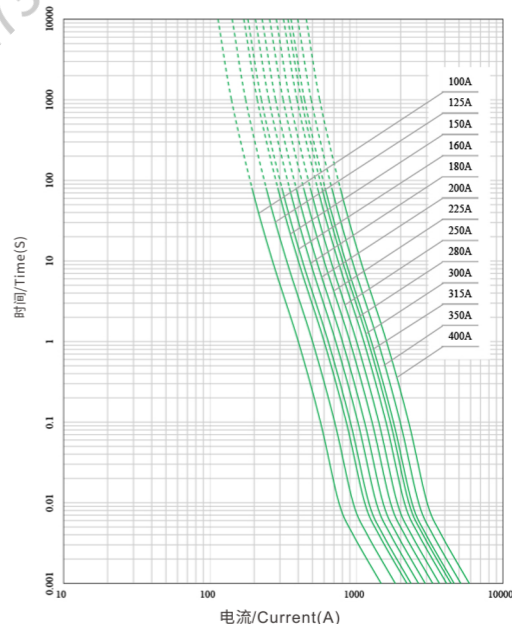

电气规格/Electrical Specifications:

产品编号 Product NO.	额定电流 Ampere Rating	额定电压 Voltage Rating	分段能力 Breaking Capacity	认证 Approvals
EVH40-100A	100A	1000Vdc	50kA	○
EVH40-125A	125A	1000Vdc	50kA	○
EVH40-150A	150A	1000Vdc	50kA	○
EVH40-160A	160A	1000Vdc	50kA	○
EVH40-180A	180A	1000Vdc	50kA	○
EVH40-200A	200A	1000Vdc	50kA	○
EVH40-225A	225A	1000Vdc	50kA	○
EVH40-250A	250A	1000Vdc	50kA	○
EVH40-280A	280A	1000Vdc	50kA	○
EVH40-300A	300A	1000Vdc	50kA	○
EVH40-315A	315A	1000Vdc	50kA	○
EVH40-350A	350A	1000Vdc	50kA	○
EVH40-400A	400A	1000Vdc	50kA	○

● 表示已获认证
○ 表示认证中