



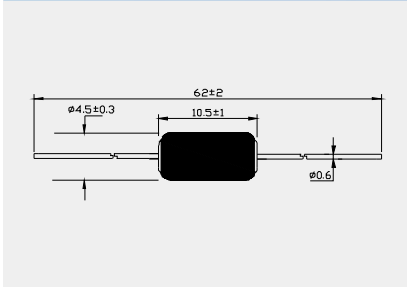

复合保险丝 Multiple Protector Fuse

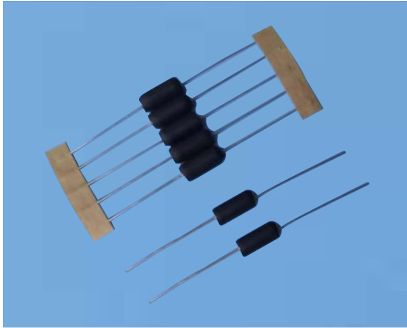

测试标准:
Testing Standard:
IEC60691 IEC60127-8 UL1412

工作温度:
Operating Temperature:
-55°C ~ +125°C

额定分断能力:
Interrupting Rating:
300 Amperes at 250V AC

材料:
Materials:
End cap: Sn plated iron
Tube: Ceramic tube
Lead wire: Tinned copper wire
Coat: EVA

焊接方法:
Soldering Method:
Wave soldering: 260°C, 5s max
Manual soldering: 350°C, 3s max

包装:
Packaging:
Automaton taped 1000PCS per inner, 10000PCS per carton

安全认证: Safety Approvals:

认证 Approvals	额定功率 Rated Power (W)	额定阻值 Rated Resistance (Ω)	证书号码 Certification No.
UL	1W/2W	0.47Ω~68Ω	E507738
TUV	1W/2W	0.47Ω~68Ω	R50438618

目录编号: Catalog No. 1:1W 2:2W B:3% C:5% D:10%

系列 Series	目录编号 Catalog No.	额定功率 Rated Power (W)	额定阻值 Rated Resistance (Ω)	精度 Tolerance (%)	额定动作温度 Rated Functioning Temperature Tf (°C)	认证 Approvals ● 表示已获认证 ○ 表示认证中	
							
TRC	TRC0111/2C	1W/2W	1.1Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0121/2C	1W/2W	1.2Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0151/2C	1W/2W	1.5Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0201/2C	1W/2W	2.0Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0221/2C	1W/2W	2.2Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0271/2C	1W/2W	2.7Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0281/2C	1W/2W	2.8Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0331/2C	1W/2W	3.3Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0471/2C	1W/2W	4.7Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0511/2C	1W/2W	5.1Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0561/2C	1W/2W	5.6Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0601/2C	1W/2W	6.0Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0681/2C	1W/2W	6.8Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0751/2C	1W/2W	7.5Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0821/2C	1W/2W	8.2Ω	±5%/±10%	115-226°C	●	●
TRC	TRC0911/2C	1W/2W	9.1Ω	±5%/±10%	115-226°C	●	●
TRC	TRC1101/2C	1W/2W	10Ω	±5%/±10%	115-226°C	●	●
TRC	TRC1121/2C	1W/2W	12Ω	±5%/±10%	115-226°C	●	●
TRC	TRC1221/2C	1W/2W	22Ω	±5%/±10%	115-226°C	●	●
TRC	TRC1331/2C	1W/2W	33Ω	±5%/±10%	115-226°C	●	●
TRC	TRC1471/2C	1W/2W	47Ω	±5%/±10%	115-226°C	●	●
TRC	TRC1511/2C	1W/2W	51Ω	±5%/±10%	115-226°C	●	●
TRC	TRC1561/2C	1W/2W	56Ω	±5%/±10%	115-226°C	●	●
TRC	TRC1681/2C	1W/2W	68Ω	±5%/±10%	115-226°C	○	●