




TK RoHS Compliant

温度保险丝(塑胶方壳)

Thermal-link (Plastic square shell)

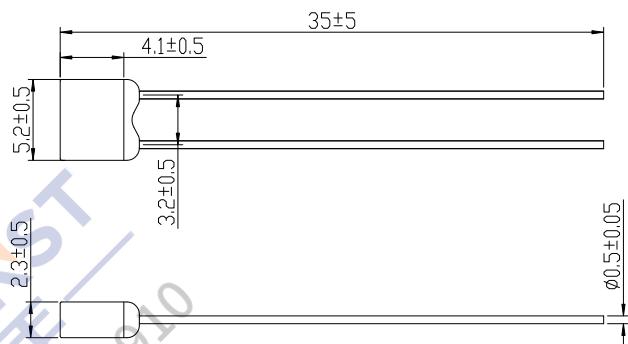

序号 NO.	目录 编号 Catalog No.	额定 动作 温度 Tf (°C)	熔断 温度 Fusing -Temp. (°C)	保持 温度 Th (°C)	极限 温度 Tm (°C)	额定 电流 Ir (A)	额定 电压 Ur (Vac)	认证 Approvals			
								● 表示已获认证 ○ 表示认证中			
1	TK76	76	73±2	48	180	1	250	●	○	●	
2	TK86	86	82±2	58	180	1	250	●	○	●	
3	TK102	102	98±2	77	180	1	250	●	●	●	
4	TK115	115	111±2	87	180	1	250	●	●	●	
5	TK125	125	120±2	98	180	1	250	●	●	●	
6	TK130	130	126±2	100	180	1	250	●	●	●	
7	TK136	136	132±2	102	180	1	250	●	●	●	
8	TK145	145	141±2	118	180	1	250	●	●	●	
9	TK150	150	146±2	122	180	1	250	●	●	●	

术语解释 Terms explanation:

额定动作温度 Rated Function Temperature(Tf):

在规定条件下测得的使温度保险丝导电状态发生改变的温度，温度保险丝必须在上述 Tf+0/-10°C 范围内动作。

The temperature of the Thermal-link which cause it to change its state of conductive when measured under specified conditions, the temperature tolerance is Tf+0/-10°C.

实测熔断温度 Fusing Temperature:

温度保险丝以每分钟 0.5 ~ 1.0°C 速率上升，检测电流小于 10 mA 条件下所测得的烤炉中发生动作时的温度。

It is the actual operating temperature when the Thermal-link is made to operate at the conditions that the temperature is raised at the rate of 0.5°C ~ 1°C per minute and the detection current less than 10 mA.

保持温度 Holding Temperature(Th):

温度保险丝在通过额定电流时，能够连续维持 168 小时而承受的最高不致其导电状态发生改变的温度。

The maximum temperature at which the Thermal-link can be maintained while conducting rated current for 168 hours without functioning.

极限温度 Maximum Temperature Limit(Tm):

温度保险丝所能处在的最高温度，在此温度下，温度保险丝的导电状态已发生改变，但其机械性能和电气特性在 10 分钟内不致改变。

The maximum temperature at which mechanical and electrical properties of the Thermal-link can be maintained for 10 minutes without resuming conductivity after functioning.

额定电流 Rated Current (Ir):

温度保险丝在所使用的电路中能承受的最大电流。

The maximum current that is allowed to apply to the circuit in which the Thermal-link is used.

额定电压 Rated Voltage(Ur):

温度保险丝在所使用的电路中能承受的最大电压。

The maximum voltage that is allowed to apply to the circuit in which the Thermal-link is used.