

1. 适用范围 / SCOPE

此份规格书仅涵盖0603FF系列产品.

This specification covers 0603FF series devices, which is SMD Fuse.

2. 产品名称及编码 / TYPE NUMBER & PART NUMBER

2-1 产品名称/ TYPE NUMBER

0603FF	****A	****V	
1	2	3	4

(1) 系列号: 0603FF (尺寸: 0.06×0.03; 熔断特性:快断)

Series Number: 0603FF (Size: 0.06×0.03; Melting characteristic: Fast Acting)

(2) 额定电流: (例如:3.5A=3.5 安培)

Rating Current : (Ex. :3.5A = 3.5 Ampere)


(3) 额定电压: (例如:32V=32 伏特)

Rating Voltage : (Ex. :32V = 32 Volt)

(4) 安规认证 / Safety Approval


3. 产品尺寸和结构 / SIZE AND STRUCTURE

3-1 尺寸（单位: mm） / SIZE (Unit: mm)

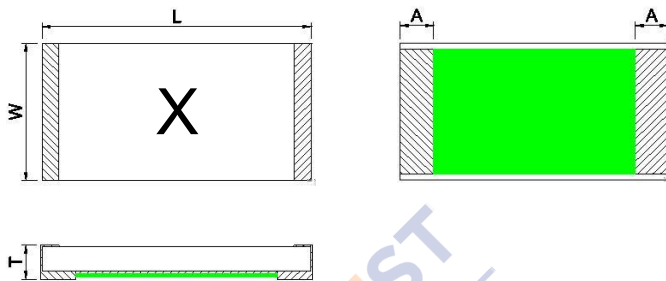

型号 / Type number	W	L	T	A
0603FF****A***V	0.81±0.15	1.60±0.15	0.48±0.08	0.35±0.20

3-2 产品结构及使用材料说明 / STRUCTURE & MATERIAL

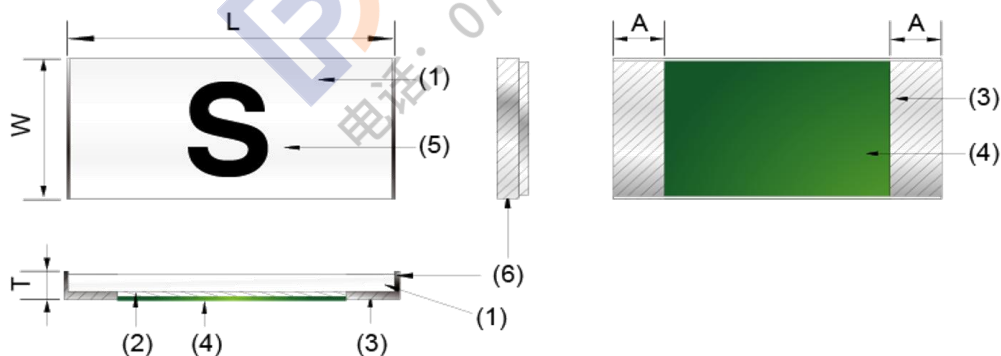

编号 No	元件 Component	材质 Material	数量 Quantity
①	基板 Substrate	氧化铝陶瓷 Alumina Ceramic	1
②	涂层 Coating	玻璃浆 Glass cover	1
③	熔丝本体 Fuse element	银 Silver	1
④	保护防焊层 Protective coating	防火级环氧树脂 Flame-retardant epoxy	1
⑤	文印防焊层 Marking coating	防火级环氧树脂 Flame-retardant epoxy	1
⑥	端头 End Termination	镀银 Silver plated	2

4. 基本信息/ ORDERING INFORMATION

Part No. 料号	Rated Voltage 额定电压 (DC)	Rated Current 额定电流(A)	Breaking Capacity(A) 分断能力	Typical Cold. Resistance (mOhms) ² 标准冷电阻	Typical Pre-Arcing I ² t(A ² Sec) 熔化热值	Marking 标记
0603FF250mA	24V/32V/48V/63V	250mA	50A@24Vdc 50A@32Vdc 50A@48Vdc 50A@63Vdc	3250	0.00042	D
0603FF375mA		375mA		1800	0.00093	E
0603FF500mA		500mA		1070	0.001	F
0603FF630mA		630mA		-	-	-
0603FF750mA		750mA		470	0.009	G
0603FF1A		1A		250	0.0095	B
0603FF1.5A		1.5A		150	0.04	H
0603FF2A		2A		78	0.11	K
0603FF2.5A		2.5A		49	0.135	L
0603FF3A		3A		35	0.21	O
0603FF3.5A		3.5A		28	0.45	R
0603FF4A		4A		18	0.56	S
0603FF5A		5A		14	1.2	T
0603FF6A		6A		11	1.7	V*
0603FF7A		7A		9.5	2.3	X*
0603FF8A		8A		7	3.0	Z*

说明/Notes :

- a. “一般电阻值”是在通以小于额定电流的 10%的弱电流条件下量测的阻抗.

Nominal Resistance measured with <10% rated current ;

- b. “一般 I²t”是指自通电至作动时间为 8ms 的过程所对应的 I²t.

Nominal Melting I²t measured at 8 m sec opening time ;


5. 电气特性 / ELECTRICAL CHARACTERISTICS

5-1 时间-电流特性/ Pre-Arcing Time-Current Characteristics (limits)

RATED CURRENT	1 IN/倍	2.0 IN/倍
250mA to 8A	Min.	Max.
	4hrs	60s

In : 25℃下额定电流 / Rating Current at 25℃

时间-电流特性曲线 / Time-Current Curve:

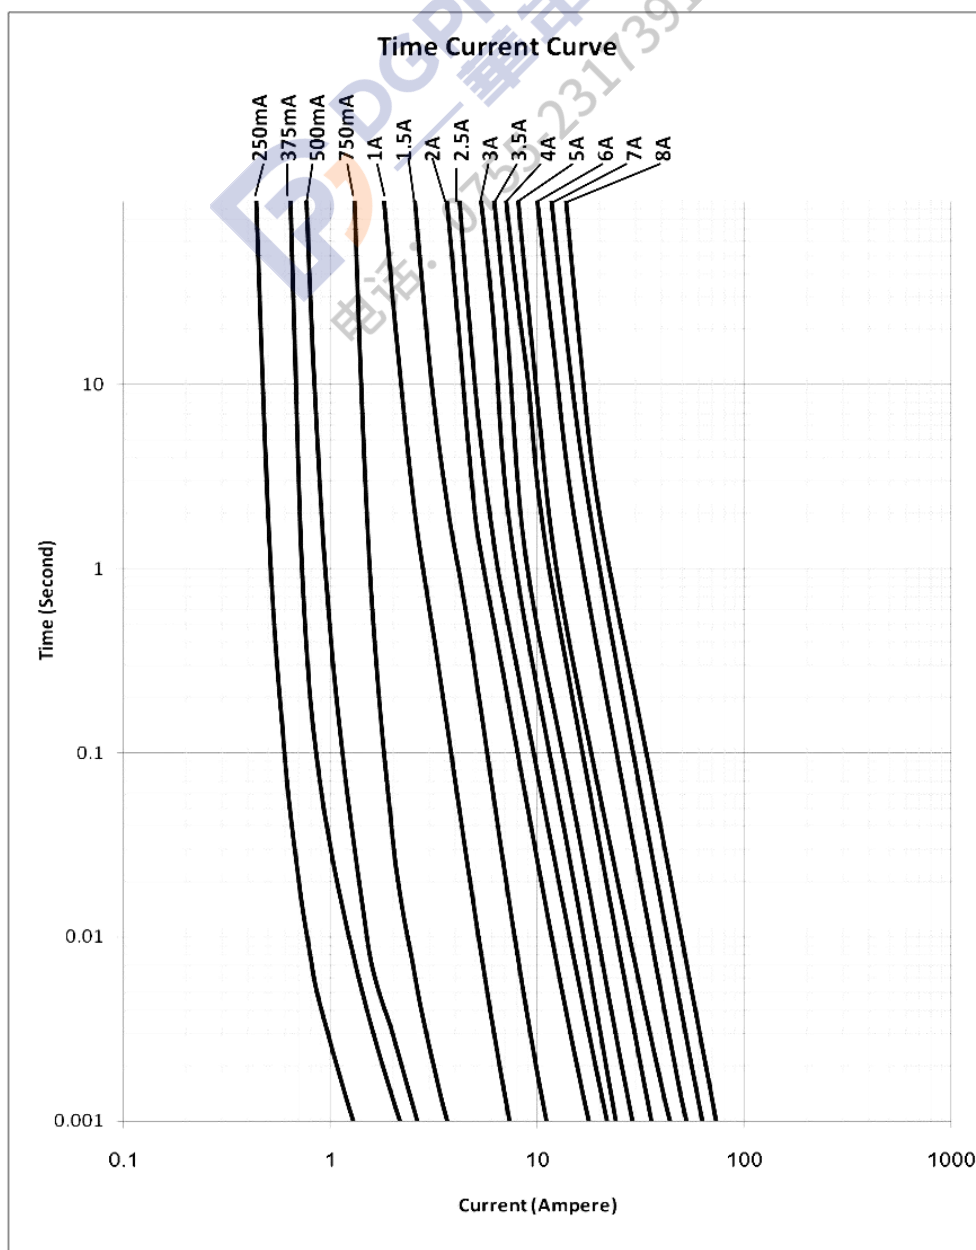

5-2 分断能力 / Breaking Capacity

额定电流 RATED CURRENT	分断能力 BREAKING APACITY
250mA to 8A	50A@24Vdc 50A@32Vdc 50A@48Vdc 50A@63Vdc

DGPHNST
— 華年 —
电话: 0755-23173910

6. 产品特性及信赖性测试规范/PRODUCT CHARACTERISTICS AND RELIABILITY TEST STANDARD

序号 No.	项目 Item	内容 Contain	判定标准 Criteria
1	时间/电流特性 Time/current characteristics	分别通以1.0In、2.0In电流， 得出相对应的时间 I=1.0In、2.0In and measure the value of time individually by meter ,	各电流条件下的时间参数符合规定值 Value of time measured in different currents is within spec. UL248-1/-14
2	分断能力测试 Breaking capacity	V = 32 V DC /63V DC ; I=50A	没有持续电弧、燃烧、爆炸现象 No a permanent arcing, ignition, bursting UL248-1/-14
3	可焊性 Solder ability	熔锡温度245℃±5℃，浸锡时间 5s±0.5s，浸入深度从基座面起 2.0mm±0.5mm，放在20X的放大 镜下 Cover ≥95%检查T=245℃ ±5℃, t=5s±0.5s, magnifier : 20X	锡覆盖率≥95% MIL-STD-202 Method 208
4	抗焊性测试 Soldering heat resistance	熔锡温度/ T =250℃±5℃，浸锡时间 / t =30±5s T=250±5℃, t=30±5s	外观无裂纹和损伤，前后阻值偏差小于或 等于±15%；文印清晰可辨 No crack and damage, ΔR<15% Marking is easily legible MIL-STD-202, Method 210F, Condition K
5	冷热冲击 Thermal Shock	-65℃,放置时间为15min,→ 25℃, ,放置时间为5min→ 125℃放置时间15min 循环次数为100个 -65℃ 15min~25℃ 5min~ +125℃ 15min ; 100 cycles	外观无裂纹和损伤，前后阻值偏差<±10% No crack and damage, ΔR<10% MIL-STD-202, Method 107G conditionB-3
6	机械冲击 Mechanical Shock	峰值100 G,持续时间11ms,波形: 半正弦, 五次脉冲 a=100G for 11ms, 5pulses	外观无裂纹和损伤，前后阻值偏差<± 10%。 No crack and damage, ΔR<10% MIL-STD-202, Method 213B
7	振动测试 Vibration	承受振幅为0.03 英寸(全程最大0.06 英寸),频率在大约10Hz到55Hz 的范 围均匀地变化的简谐运动.)	MIL-STD-202, Method 201A
8	高频振动测试 Vibration, High Frequency	20g's峰值, 公差值为±10%, 振动 频率10Hz-2000Hz, 总计时间为 12h	MIL-STD-202, Method 204D, Condition D


7. 环境特性 / ENVIRONMENTAL CHARACTERISTIC

7-1 操作温度范围: -55℃~125℃ / Operating Temperature:-55℃~125℃

若贵司操作环境温度超出23±3℃范围, 在选用保险丝规格时, 需考虑操作环境温度对保险丝的影响。请参照: 温度-电流曲线图。

When choosing the fuse's specification, if the operating environmental temperature beyond the scope from 20~26℃, you should consider the environmental temperature's affection to fuses. please refer:

Temperature-Current curve:

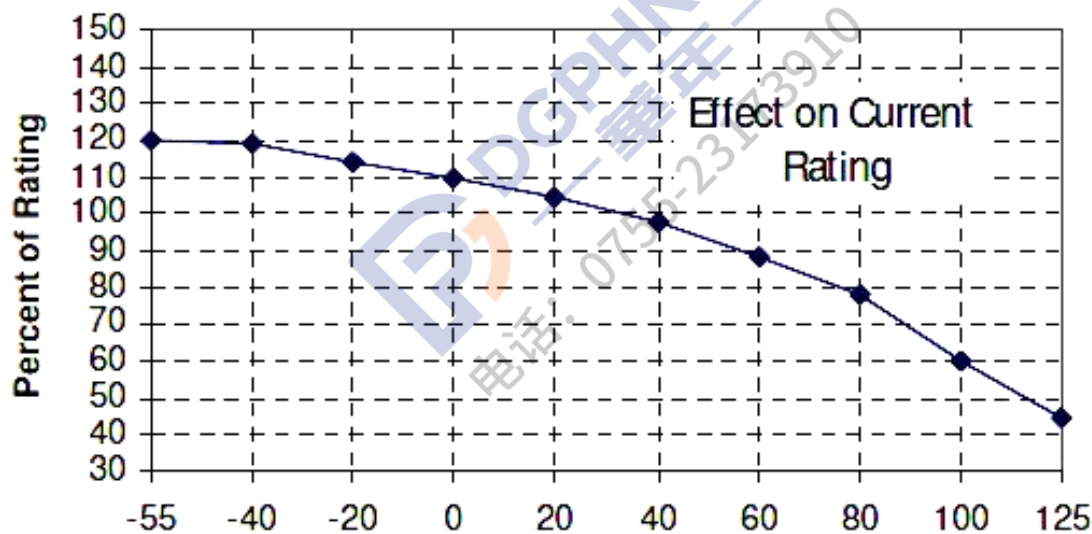

7-2 存储条件 / Storage Conditions

在温度10℃~40℃、相对湿度≤75%的密闭条件下可存放2 年。

Under airtight in temperature10℃~40℃、relative humidity ≤75% can store 2 years.

在温度10℃~40℃、相对湿度为95%的非露天下最多可存放30 天。


Without dew in temperature10℃~40℃、relative humidity be 95% maximum value for 30days.

8. 焊垫尺寸及焊接条件 / SOLDER PAD SIZE AND WELDING CONDITIONS

8-1 焊垫尺寸建议 / Recommended Size of the Pad.

L	W	D	t
1.50mm	0.90mm	0.50mm	≥ 35μm

t : 元件焊垫金属层厚度 (min.) / t : Thickness of pad metal (min.)

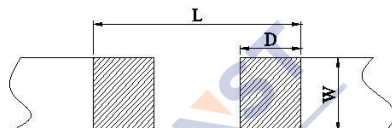

8-2 焊接参数建议 / Recommended Customer Soldering Parameters

温度曲线 Temperature Condition

预热段 : 145 ± 15°C, max. 120 sec.


Preheating : 145 ± 15°C, max. 120 sec.

焊锡段 : min. 220°C, max. 60 sec.

Soldering: min. 220°C, max. 60 sec.

允许最高温度 : 260 ± 5°C, max. 10sec.

Maximum temperature : 260 ± 5°C, max. 10sec.

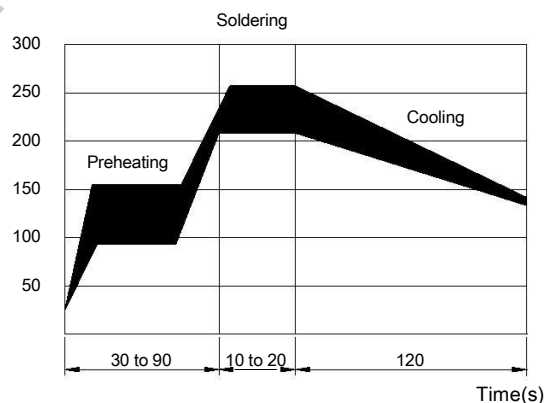

允许烙铁焊接条件(热风设备): 350°C, 3~5seconds

Rework Temperature (hot air equipment) : 350°C, 3~5seconds

8-3 焊接方法建议 / Recommended Reflow Methods

焊接热源方式可用红外线, 热蒸气, 热风

IR, vapor phase oven, hot air oven.

如果焊锡温度超过允许最高温度, 则产品本身会有功能损坏的疑虑

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

9. 批量生产出货测试项目 / LOT ACCEPTANCE TEST REQUIREMENTS

9-1 外观 / Visual

方法：利用放大镜进行检查

Procedure: Visual

标准：不能有脏污、不洁、文印错误、破损等

Acceptance Criteria: No parts are outstandingly stained.

9-2 尺寸 / Dimensions

方法：使用合适且经校正的标尺

Procedure: As appropriate, calipers, micrometers, optical comparator, or approved gages.

标准：尺寸均在规定标准范围内

Acceptance Criteria: No parts outside specific dimensions.

9-3 时间-电流特性 / Time-Current Characteristics

方法：测试电流 $I=1.0I_n; 2.0I_n$, 量测出个别电流下的对应时间

Procedure: $I=1.0I_n; 2.0I_n$ and measure the value of time individually by meter at 25°C

标准：对应时间值均在规定标准范围内 / Acceptance Criteria: All parts must within the specific .

9-4 分断能力 / Breaking Capacity

方法：测试电压\电流为 $V = 63V/32V$ DC ; $I=50A$, 利用此条件冲击元件

Procedure: $V = 63V/32$ DC ; $I=50A$

标准：元件不发生持续电弧燃烧及爆裂

Acceptance Criteria: No permanent arcing, ignition, bursting

10. 安全认证及编号 / STANDARDS AND APPROVALS

UL


E213695

11. 包装讯息 / PACKING INFORMATION

11-1 包装数量、重量 / QUANTITY & WEIGHT

编码 Part Number	数量 (pcs) Quantity(pcs)	重量(g) Weight(g)
0603 FF *A *V	5,000	140±20

11-2 卷轮规格 / Reel & Tape specifications

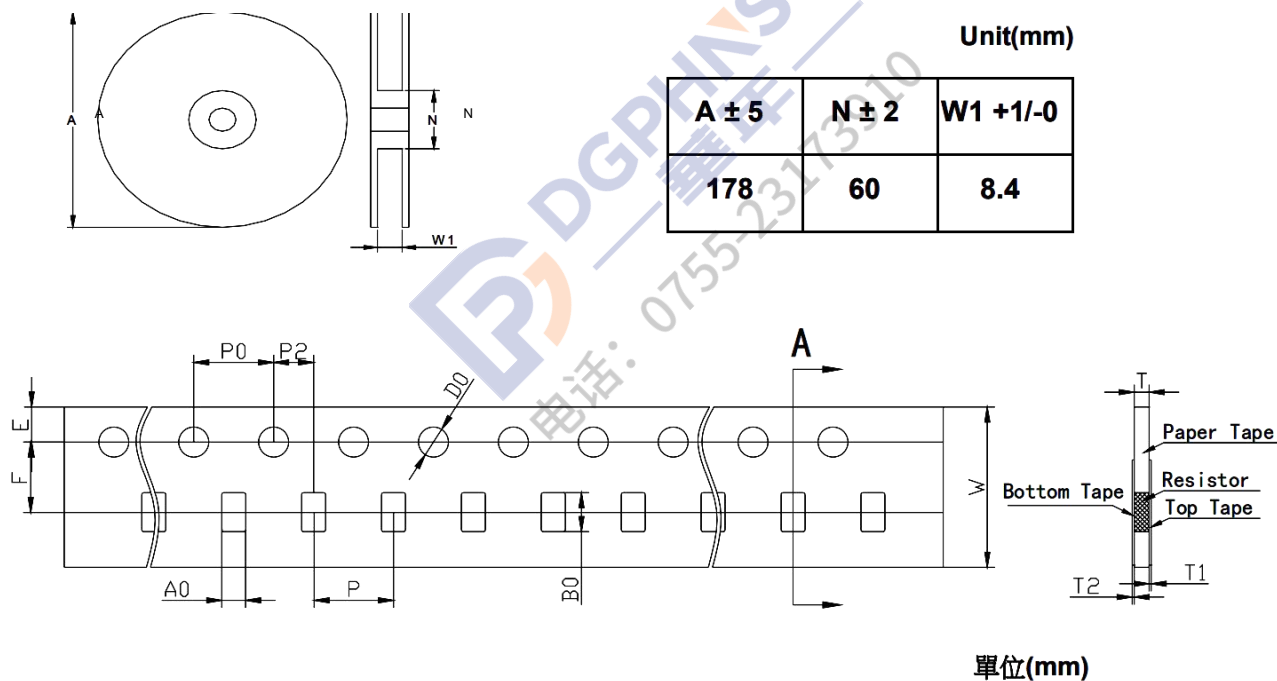


W	8.00 ± 0.30	D0	1.50 ± 0.10
P0	4.00 ± 0.10	F	3.50 ± 0.10
P	4.00 ± 0.10	E	1.75 ± 0.10
P2	2.00 ± 0.10	T	0.80 ± 0.10
A0	1.20± 0.15	T1	max.01
B0	1.95± 0.15	T2	max.01

11-3 密封胶膜剥离强度要求 / Peeling Strength of Seal Tape

F = 剥离强度 : 0.3 – 1.0N (30 - 100gf)

F = Peeling Strength: 0.3 – 1.0N (30 - 100gf)

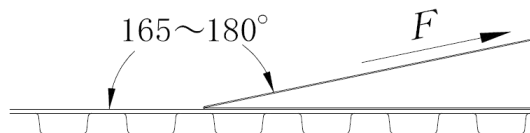

12. 其他 / OTHERS

12-1 如果在使用中有超出本规格书的要求，必须经由双方协商确认。

In the event that an impropriety is found beyond this specification ,it shall be fixed by mutual agreement between the parties.

12-2 如果本规格书有不适当的情况，必须通过双方协商并由本公司修改。

In the event that an impropriety is found in this specification , LANBAO ELECTRICAL APPLIANCES CO. LTD. shall amend it by mutual agreement between the parties.

DGPHNST
— 華年 —
电话: 0755-23173910

版次	制作	确认	审核
第 2 版	赖秋莲 2022/01/07	谢海林 2022/01/07	熊士军 2022/01/07

JDYX2.E213695 - Fuses, Supplemental - Component

Fuses, Supplemental - Component

ZHONG SHAN LANBAO ELECTRICAL APPLIANCES CO LTD
West Xing Pu Rd
Huang Pu
Zhongshan, Guangdong 528429 China

E213695

Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
Supplemental fuses				
2C	5 x 20 (0.20 x 0.79)	0.1-2.5	250Vac	100
		5-12.5	250Vac	100
2F	5.2 x 20 (0.20 x 0.79)	2.5-6.3	250Vac	100
		0.1-2	250Vac	35
2T	5.2 x 20 (0.20 x 0.79)	0.1-0.4	250Vac	35
		0.5-1.0	250Vac	35
		1.1-5.0	250Vac	100
		6.0-15	250Vac	100
3F	6.3 x 32 (0.25 x 1.26)	0.1-10	250Vac	100
		12-15	250Vac	100
3T	6.3 x 32 (0.25 x 1.26)	0.1-10	350Vac	100
		10.1-20	350Vac	100
RFI-20	5.2 x 20 (0.20 x 0.79)	0.1-2.0	250Vac	35
		2.5-6.3	250Vac	100
RFI-30	6.3 x 32 (0.25 x 1.26)	0.1-10	250Vac	100
		12-15	250Vac	100
RTC-20	5 x 20 (0.20 x 0.79)	0.1-2.5	250Vac	100
		5-12.5	250Vac	100

RTI-20	5.2 x 20 (0.20 x 0.79)	0.1-0.4	250Vac	35
		0.5-1.0	250Vac	35
		1.1-5.0	250Vac	100
		6.0-15	250Vac	100
RTI-30	6.3 x 32 (0.25 x 1.26)	0.1-10	250Vac	100
		10.1-20	250Vac	100
Supplemental fuses: pigtail leads				
2P	5.2 x 20 (0.20 x 0.79)	2.5-6.3	250Vac	100
		0.1-2	250Vac	35
RFP-20	5.2 x 20 (0.20 x 0.79)	0.1-2.0	250Vac	35
		2.5-6.3	250Vac	100
Supplemental fuses: filled-tube, cartridge enclosed				
LB630	6.4 x 31.8 (0.25 x 1.25)	0.1-30	750Vac	500
		0.1-30	750Vdc	500
		0.1-30	500Vac	500
		0.1-30	500Vdc	500
		0.1-30	250Vac	500
		0.1-30	250Vdc	500
Supplemental fuses: pigtail leads, filled-tube, cartridge enclosed				
LB630(P)	6.8 x 32.5 (0.27 x 1.28)	0.1-30	750Vac	500
		0.1-30	750Vdc	500
		0.1-30	500Vac	500
		0.1-30	500Vdc	500
		0.1-30	250Vac	500
		0.1-30	250Vdc	500
Supplemental micro fuses: pigtail leads, surface mount				
TB, TR	8.5 x 4 x 5 (0.33 x 0.16 x 0.20)	0.05-10	400Vac	100
		0.05-10	300Vac	100
		0.05-10	250Vac	100

		0.05-10	125Vac	100
		0.05-10	125Vdc	100
Supplemental micro fuses: surface mount				
0603FF, 0603HI or 0603TD	1.6 x 0.8 x 0.5 (0.06 x 0.03 x 0.02)	0.25-8	24Vdc	50
		0.25-8	32Vdc	50
		0.25-8	48Vdc	50
		0.25-8	63Vdc	50
1206FF, 1206HI, 1206HV or 1206TD	3.2 x 1.6 x 0.5 (0.13 x 0.06 x 0.02)	0.25-10	125Vac	50
		0.25-10	63Vdc	50
		0.25-10	72Vdc	50
		0.25-10	125Vdc	50
		0.25-30	48Vdc	200
		0.25-50	24Vdc	200
		0.25-50	32Vdc	200
		0.25-50	36Vdc	200

Marking: Company name or trademark  and model designation.

Last Updated on 2022-01-07

并不是所有出现在本数据库中的公司名称和产品都满足了UL 跟踪检验服务的要求。只有带有 UL 标志的产品，才应该被视为经过 UL 认证，并满足UL 跟踪检验服务的要求。注意查看产品上的标志。

UL 允许在线认证目录中所含材料的复制遵循以下条件：1.指南信息、装配、构造、设计、系统和/或认证（文件）必须在不篡改任何数据（或图纸）的情况下完整且无误导性地呈现。2.“经 UL 允许从在线认证目录转载”声明必须出现在所摘取材料的邻近位置。此外，转载材料必须包含以下格式的版权声明：“© 2022 UL LLC”