

### 1. 用範圍 / SCOPE

WN30 系列小型保險絲，適用於數字儀表。  
 WN30 series Miniature-Fuse, used in Digital Measuring Instruments.

### 2. 產品型號 / TYPE

例「example」：



- ① 系列號 / Series Number
- ② 額定電流 / Rated Current
- ③ 額定電壓 / Rated Voltage
- ④ 認證符號 / Approved Symbol

### 3. 額定電流和額定電壓/ RATED CURRENT AND RATED VOLTAGE

額定電流 / Rated Current: 200mA~20A


額定電壓 / Rated Voltage: 400/500V DC 600V/AC

### 4. 標示 / MARKING

保險絲上需有下列標示/The fuses shall have the following marking

製造工廠的標識+系列號/ Manufacture's Logo+ Part Number:

額定電流+額定電壓/ Rated Current (A)+ Rated Voltage(V):



注意 / Note :

對標示的大小和位置沒有規定 / Size and position of the markings shall not be provided.

### 5. 外觀及形狀 / APPEARANCES AND CONFIGURATION

5-1 外觀：不應有破碎、明顯的污斑。


Appearances: There shall not be break up and any remarkable blotch.

5-2 形狀：小型保險絲。

Configuration: Miniature-Fuse.


### 6. 工程圖和結構 / OUTLINE DRAWING AND STRUCTURE

6-1 工程圖（單位：mm） / Outline Drawing and Dimensions (Unit: mm)

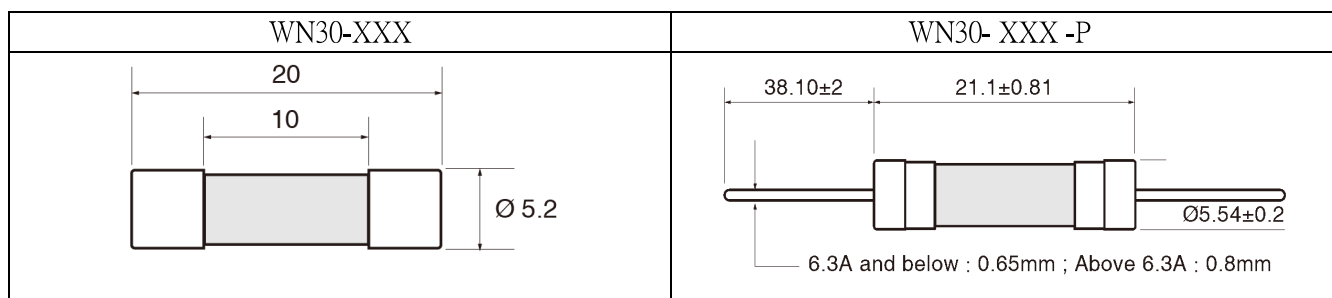



8. 時間電流曲線 Time-Current Curve

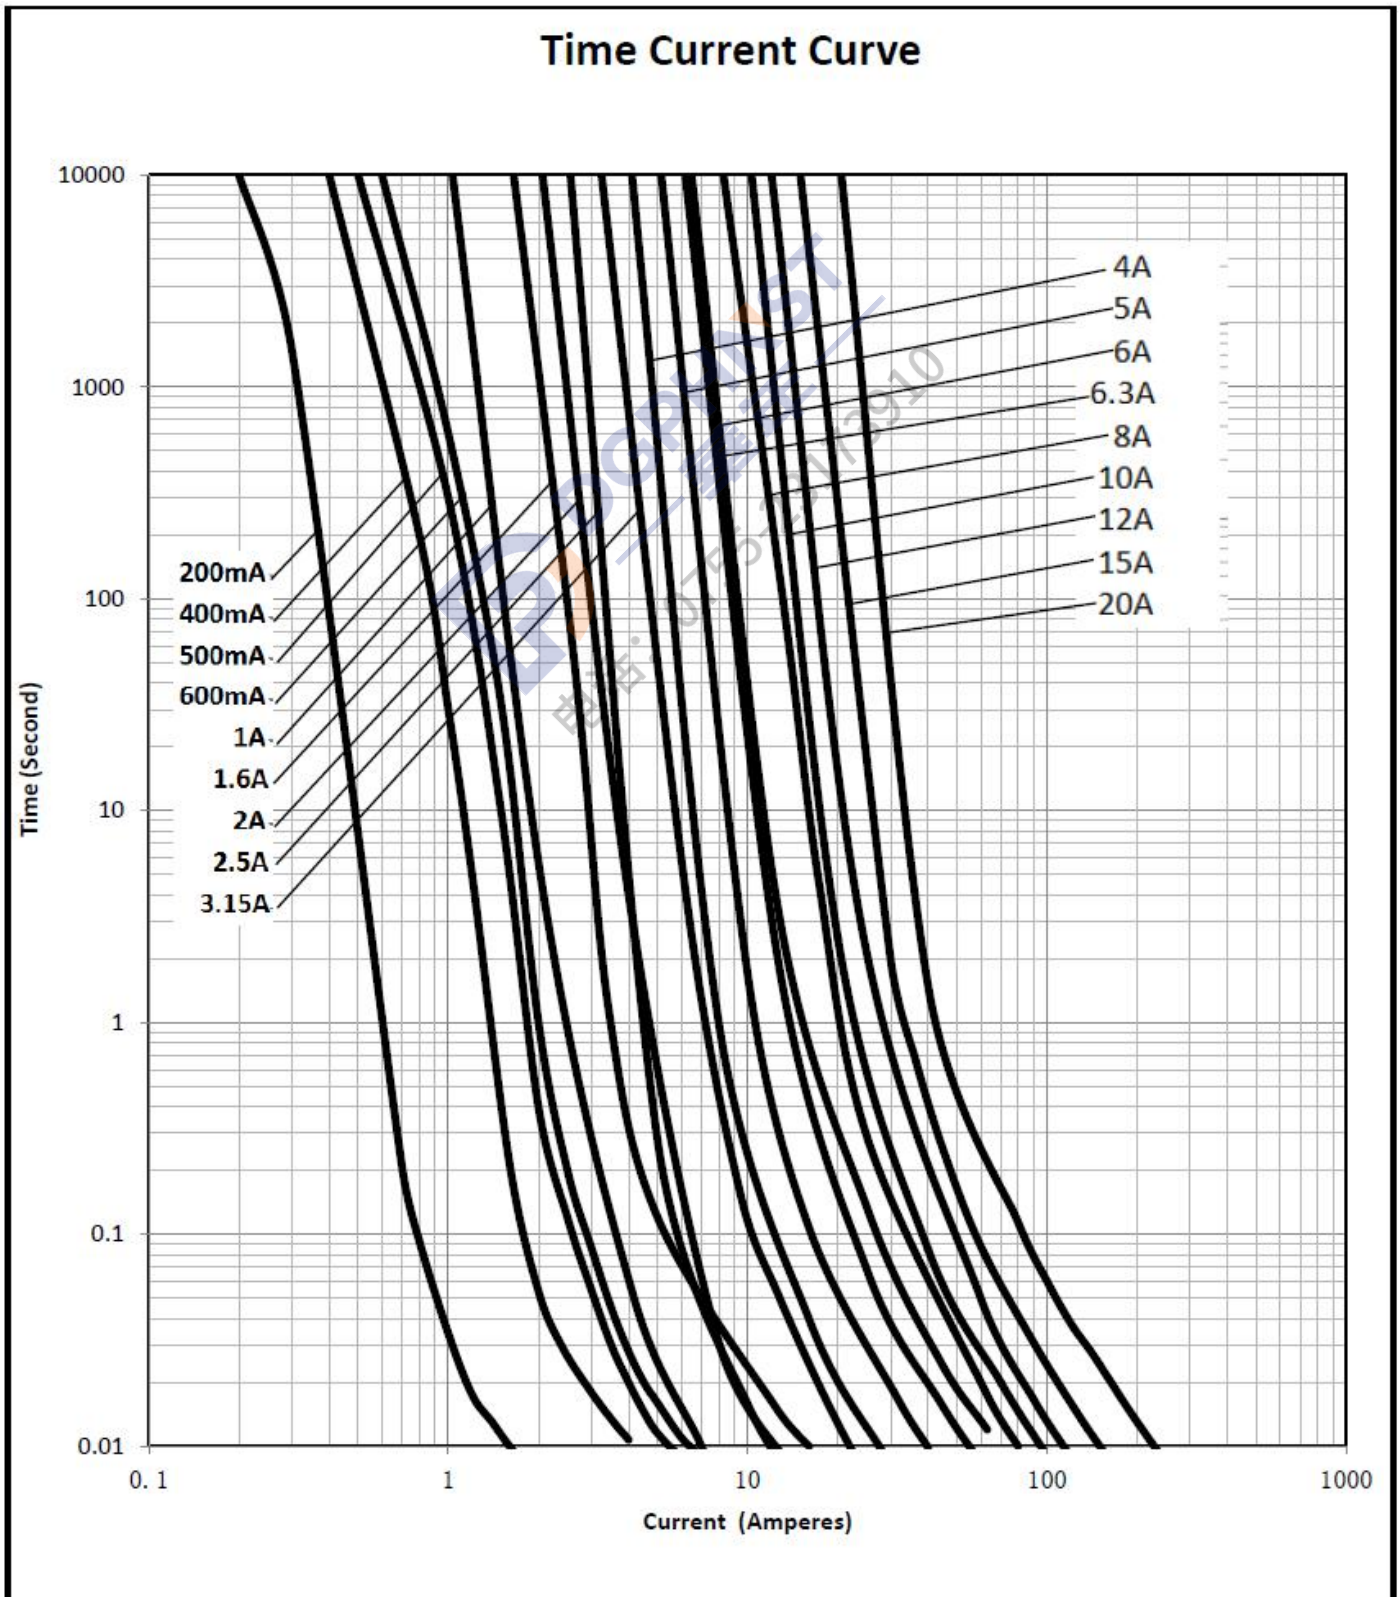


9. 環境特性 / ENVIRONMENTAL CHARACTERISTIC

9-1 操作溫度範圍:  $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$  / Operating Temperature:  $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$

若貴司操作環境溫度超出 $25 \pm 5^{\circ}\text{C}$ 範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。  
請參照：溫度-電流曲線圖。

When choosing the fuse's specification, if the operating environmental temperature beyond the scope from  $20 \sim 30^{\circ}\text{C}$ , you should consider the environmental temperature's affection to fuses.  
Please refer : Temperature-Current curve:

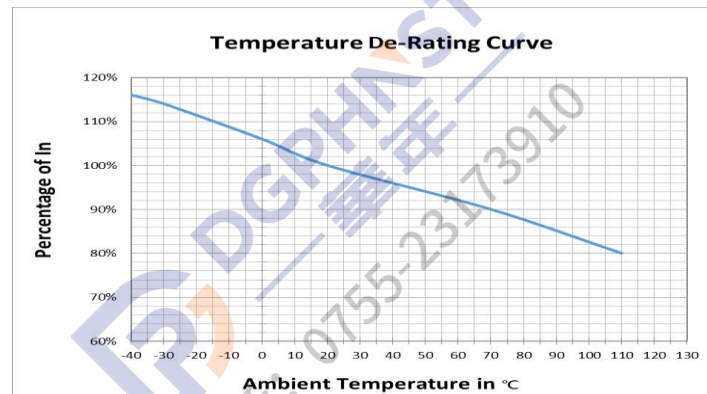

9-2 存儲條件 / Storage Conditions

在溫度 $+10^{\circ}\text{C} \sim 60^{\circ}\text{C}$ 、相對濕度 $\leq 75\%$ 的密閉條件下可存放 3 年。  
Under airtight in temperature  $+10^{\circ}\text{C} \sim 60^{\circ}\text{C}$ 、relative humidity  $\leq 75\%$  can store 3 years.

在溫度 $+10^{\circ}\text{C} \sim 60^{\circ}\text{C}$ 、相對濕度為 95%的非露天下最多可存放 30 天。  
Without dew in temperature  $+10^{\circ}\text{C} \sim 60^{\circ}\text{C}$ 、relative humidity be 95% maximum value for 30days.


10. 安全認證及編號 / STANDARDS AND APPROVALS

UR	E56092 (100mA~20A JDYX2 )
CUR	E56092 (100mA~20A JDYX8 )
TUV	B 101823 0001 Rev. 00 (1A~16A )

11. 安裝方式及條件 / INSTALLATION WAY AND PARAMETERS

11-1 建議如下圖安裝方式安裝，並滿足所要求的尺寸。

Propose that the following picture installation way is installed, and satisfied the required size.

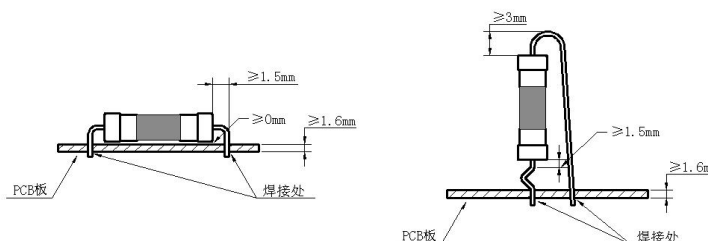

### 11-2 建議客戶焊接參數 / Recommended Customer Soldering Parameters

波峰焊參數 / Wave Parameters:

錫爐溫度 / Solder Pot Temperature: 260±3°C

焊接時間 / Solder Dwell Time: 10s Max

手工焊參數 / Hand-Solder Parameters:

烙鐵溫度 / Solder Iron Temperature: 350±5°C

焊接時間 / Heating Time: 5 s Max


### 12 包裝 / PACKING

#### 12-1 數量 / Quantity

規格/Specs	袋 Inner polybag	小盒 Inner small box	大盒 Inner big box	外箱 outer carton
WN30-XXX (rated current <1A)	500 PCS	/	500 PCS	10K PCS
WN30-XXX (rated current 1-2.5A)	/	40 PCS	400 PCS	9600 PCS
WN30-XXX (rated current ≥3A)	500 PCS	/	500 PCS	10K PCS
WN30-XXX-P	/	/	100 PCS	1800 PCS

#### 12-2 盒裝(大) / Inner big box


單位/Unit: mm

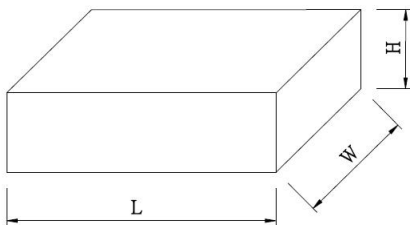

規格/ Specs	L	W	H
WN30-XXX (rated current <1A)	185±3	75±3	65±3
WN30-XXX (rated current 1-2.5A)	115±3	110±3	45±3
WN30-XXX (rated current ≥3A)	185±3	75±3	65±3
WN30-XXX-P	140±3	105±3	45±3

#### 12-3 外箱 / Outer carton

單位/Unit : mm

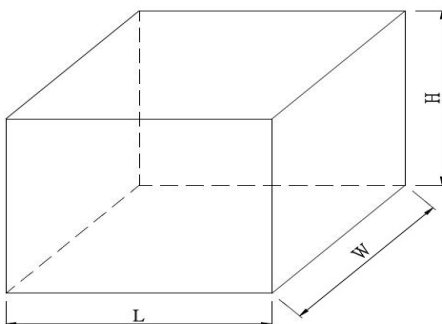

規格/ Specs	L	W	H
WN30-XXX (rated current <1A)	400±5	380±5	140±5
WN30-XXX (rated current 1-2.5A)	380±5	245±5	200±5
WN30-XXX (rated current ≥3A)	400±5	380±5	140±5
WN30-XXX-P	380±5	245±5	200±5

## 13. 其他 / OTHERS

13-1 如果在使用中有超出本規格書的要求，必須經由雙方協商確認。

In the event that an impropriety is found beyond this specification, it shall be fixed by mutual agreement between the parties.

13-2 如果本規格書有不適當的情況，必須通過雙方協商並由本公司修改。

In the event that an impropriety is found in this specification, WALTER ELECTRONIC CO., LTD. shall amend it by mutual agreement between the parties.

 DGPHNST  
— 華年 —  
电话: 0755-23173910

版次	製作	確認	審核
第六版	侯愛珍	吳讓彬	Andrew





# UL iQ for Fuses



## Fuses

E56092

### Guide Information

## SUZHOU WALTER ELECTRONIC CO LTD

NO.99 Xinli Road, Fenhu Technic Development Zone, Wujiang Jiangsu 215211 CN

### WN30

Supplemental fuses: filled-tube

Size  
mm(in)

-

Amps  
(A)

0.1 - 20  
0.1 - 20  
0.1 - 10  
0.1 - 1

Volts  
(V)

600Vac  
500Vdc  
400Vdc  
600Vac

Interrupting  
Rating (A)

200  
300  
2000  
1000

Report Date: 2016-04-01

Last Revised: 2018-11-13

© 2019 UL LLC









Product Service

# CERTIFICATE

No. B 101823 0001 Rev. 00

**Model(s):** WN10, WN20, WN30, WN10P, WN20P, WN30P

## Parameters:

Rated voltage:	420VAC/DC, 500VAC/DC
Rated current:	1A, 1.6A, 2A, 3.15A, 4A, 5A, 6.3A, 8A, 10A, 12A, 12.5A, 15A, 16A
Rated breaking capacity:	AC: 500A (for rated current: 1A, 1.6A, 2A, 3.15A, 4A, 5A, 6.3A, 8A, 10A, power factor $\geq$ 0.95) AC: 200A (for rated current: 12A, 12.5A, 15A, 16A, power factor $\geq$ 0.95 ) DC: 1000A (for rated current: 1A, 1.6A, 2A, 3.15A, 4A, 5A, 8A, 10A, 12A, 12.5A, 15A, 16A, time constant $\leq$ 1ms)
Time/current characteristics:	$t_2 \leq 1h/2.1I_N$ , $t_8 \leq 1s/10I_N$
Size:	5 x 20 mm
Altitude:	Not exceed 2000m

**Tested according to:** EN 60127-1:2006/A2:2015  
EN 60127-7:2016

**Production Facility(ies):** 001319

TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD TÜV SÜD  
ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFICAT

A4 / 07.17