
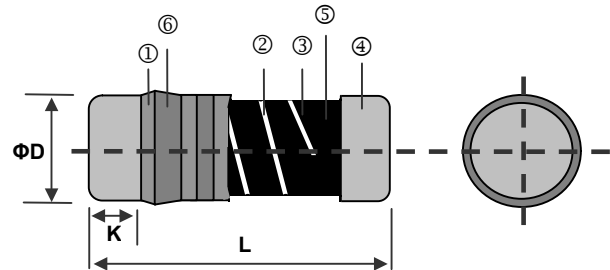


Metal Film Precision Resistor CSR Series



Features

- Excellent overall stability
- Tight tolerance down to $\pm 0.1\%$
- Extremely low TCR down to $\pm 10 \text{ PPM}/^\circ\text{C}$
- High power rating up to 1 Watts

Applications

- Automotive
- Telecommunication
- Medical Equipment
- Measurement/Testing Equipment

Dimensions


Unit: mm

Type	L	ΦD	K min.	Weight (g) (1000pcs)	Packaging 180mm (7")
CSR0204	3.50 ± 0.20	1.40 ± 0.15	0.5	18.7	3,000EA
CSR0207	5.90 ± 0.20	2.20 ± 0.20	0.5	80.9	2,000EA

Part Numbering

CSR	0204	D	T	D	V	1000
Product Type	Dimensions (L×ΦD)	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Power Rating	Resistance
	0204: 3.5x1.4 0207: 5.9x2.2	B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$ J: $\pm 5\%$	T: Taping Reel B: Bulk	B: ± 10 N: ± 15 C: ± 25 D: ± 50 E: ± 100	T: 1W U: 1/2W V: 1/4W	0100: 10Ω 1000: 100Ω 2201: 2200Ω 1001: 1KΩ 1004: 1MΩ

Derating Curve

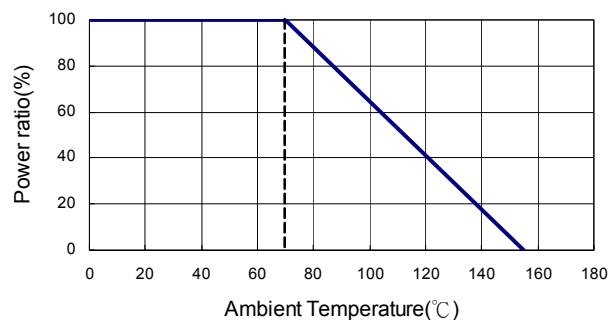

■ Standard Electrical Specifications

Item Type	Power Rating at 70 °C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range					TCR (PPM/°C)	
					±0.1%	±0.25%	±0.5%	±1%	±5%		
0204	1/4W	-55 ~ +155°C	200V	400V	100Ω-20KΩ	10Ω-20KΩ				±10	
					100Ω-100KΩ	10Ω-100KΩ				±15	
					100Ω-270KΩ	10Ω-330KΩ	4.7Ω-560KΩ	4.7Ω-1MΩ		±25	
					100Ω-270KΩ	1Ω-330KΩ	1Ω-1MΩ	1Ω-10MΩ		±50	
					-			5.11MΩ-10MΩ	-	±100	
								0.1Ω-0.91Ω			
0207	1/2W	-55 ~ +155°C	300V	500V	100Ω-20KΩ	10Ω-20KΩ				±10	
					100Ω-100KΩ	10Ω-100KΩ				±15	
					100Ω-400KΩ	10Ω-400KΩ	10Ω-560KΩ	10Ω-560KΩ		±25	
					100Ω-400KΩ	1Ω-330KΩ	1Ω-1MΩ	1Ω-5.1MΩ		±50	
					-				0.1Ω-0.91Ω		±100

■ High Power Rating Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range					TCR (PPM/°C)
					±0.1%	±0.25%	±0.5%	±1%	±5%	
0207	1W	-55 ~ +155°C	350V	700V	100Ω-100KΩ	10Ω-100KΩ				±15
					100Ω-100KΩ	4.7Ω - 1MΩ	4.7Ω - 1MΩ	4.7Ω-560KΩ		±25
					100Ω-100KΩ	10Ω - 1MΩ	1Ω - 1MΩ	1Ω - 2.2MΩ		±50
					-			0.1Ω - 0.91Ω		±100

■ Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	+20/-15/+20/+100/+20°C
Short Time Overload	△R±0.5%	RCWV*2.5 or Max. overload voltage for 5 seconds
Endurance	△R±1.5%	70±2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	△R±1.5%	40±2°C, 90~95% R.H. Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Dry Heat	△R±1.5%	at +155°C for 1000 hrs
Solderability	95%min. coverage	245±5°C for 3 seconds
Resistance to Soldering Heat	△R±0.5%	260±5°C for 10 seconds

■ Reference Standards: JIS-C 5201-1

■ Storage Temperature: 25±3°C; Humidity < 80%RH